FOX PACKAGING SERVICES

2024 CATALOGUE



FPS

BUILDING HEAVY DUTY WRAPPERS TO MEET EVERY DAY NEEDS

FPS 1L

FOOT PEDAL CONTROLLED




FORKLIFT PORTABLE FRONT AND REAR







FPS 1H

FOOT PEDAL CONTROLLED

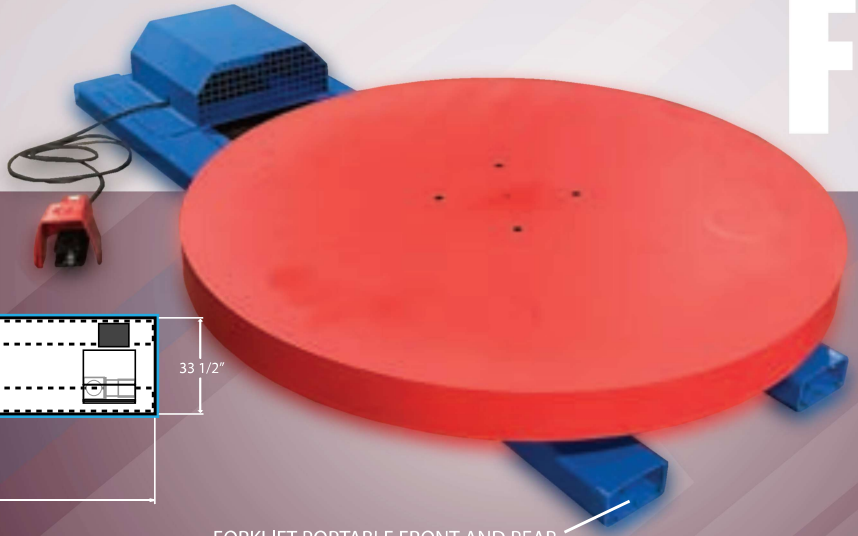

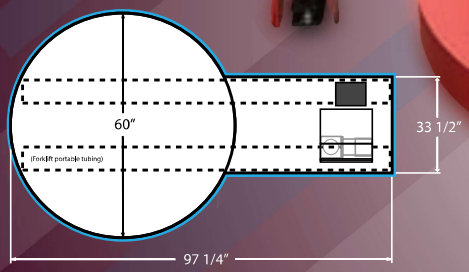

FORKLIFT PORTABLE FRONT AND REAR





SPECIFICATIONS:

CONTROLS	•SOFT START/STOP VARIABLE SPEED DRIVE
PRODUCTION SPEED	•1-25 LPH*
SUGGESTED LOAD SIZE	•55"L x 55"W x 84"H (80" Diagonal)
WEIGHT CAPACITY	•5000LBS
STRUCTURAL	•WELDED STEEL CONSTRUCTION
TURNTABLE DRIVE	•1/2HP SCR DRIVE, 20:1 GEARBOX •36 TABLE SUPPORT WHEELS (**FPS 1L**) •4 HEAVY DUTY CASTERS (**FPS 1H**)
TURNTABLE SPEED	•0-15RPM
CARRIAGE DRIVE	•N/A
FILM DELIVERY	•N/A
FILM ROLL	•14-18" HAND FILM OR STRETCH FILM
POWER REQ.	•115VAC, 15A, 60Hz- PLUG AND PLAY
SAFETY	•FOOT PEDAL DEADMAN CONTROL •SIMPLE ON/OFF SWITCH OR UNPLUG FOR EMERGENCY STOP


OPTIONS

- •LOADING RAMP **(FPS 1L ONLY)**
- •COMBINATION RAMP (For powered hand trucks) **(FPS 1L ONLY)**
- •SAFETY FENCING
- •SAFETY LIGHT CURTAINS

*SUGGESTED LOADS PER HOUR- May vary depending on load sizes, loading/unloading speeds and number of wraps or wrapping pauses on load.

FPS 100

MANUAL LIFT CARRIAGE

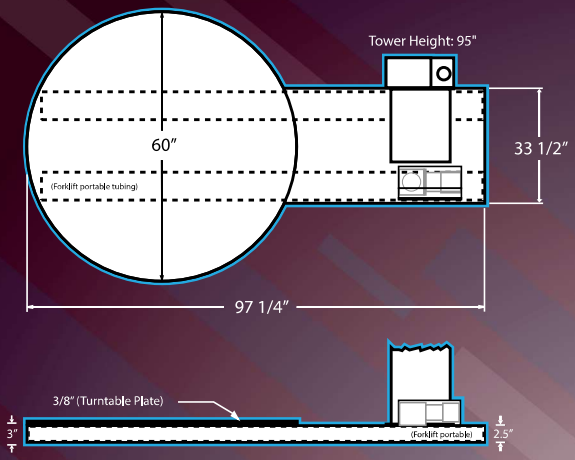

FORKLIFT PORTABLE FRONT AND REAR





COUNTER-WEIGHT BALANCED FOR EASY OPERATOR USE

SPECIFICATIONS:


CONTROLS	•SOFT START/STOP VARIABLE SPEED DRIVE
PRODUCTION SPEED	•1-25 LPH*
LOAD SIZE	•55"L x 55"W x 84"H (80" Diagonal)
WEIGHT CAPACITY	•5000LBS
STRUCTURAL	•WELDED STEEL CONSTRUCTION
TURNTABLE DRIVE	•1/2HP SCR DRIVE, 20:1 GEARBOX •36 TABLE SUPPORT WHEELS
TURNTABLE SPEED	•0-15RPM
CARRIAGE DRIVE	•1/2HP SCR DRIVE, #50 ANSI CHAIN
FILM DELIVERY	•MANUAL LIFT CARRIAGE •COUNTER WEIGHT BALANCED
FILM ROLL	•14-18" HAND FILM
POWER REQ.	•115VAC, 15A, 60Hz- PLUG AND PLAY

SAFETY	•NO PINCH POINTS •NO MOVING FILM ROLLERS •SIMPLE ON/OFF SWITCH FOR EMERGENCY STOP
OPTIONS	•LOADING RAMP •COMBINATION RAMP (For powered hand trucks) •SAFETY FENCING •SAFETY LIGHT CURTAINS

*SUGGESTED LOADS PER HOUR- May vary depending on load sizes, loading/unloading speeds and number of wraps or wrapping pauses on load.

FPS 200

FRICTION OR PRESTRETCH FILM CARRIAGE

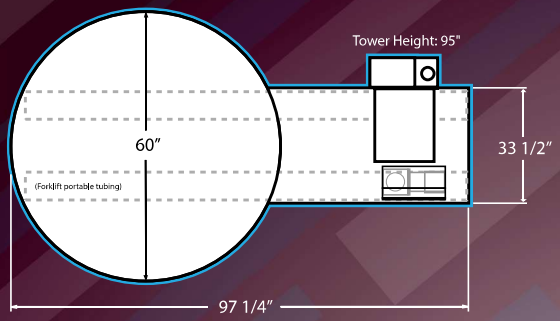



FORKLIFT PORTABLE FRONT AND REAR



SPRING LOAD© DYNAMIC CARRIAGE



•SPRING LOADED FILM HOLDER ALLOWS FOR QUICK AND EASY FILM ROLL CHANGES

•ALLOWS UP TO 100% FILM STRETCH

HURRICANE© PRESTRETCH CARRIAGE



*•**OPTIONAL** HURRICANE PRE-STRETCH FILM CARRIAGE DELIVERS UP TO 300% FILM STRETCH*

•AUTO FILM CUT

•POWER DE-ENERGIZED WHEN CARRIAGE DOOR OPEN FOR OPERATOR SAFETY

•GREATER FILM SAVINGS

SPECIFICATIONS:


CONTROLS	•PLC 4" TOUCH SCREEN CONTROLS
PRODUCTION SPEED	•1-40 LPH*
LOAD SIZE	•55"L x 55"W x 90"H (80" Diagonal)
WEIGHT CAPACITY	•5000LBS
STRUCTURAL	•WELDED STEEL CONSTRUCTION
TURNTABLE DRIVE	•1/2HP SCR DRIVE •#50 ANSI CHAIN, 20:1 GEARBOX •36 TABLE SUPPORT WHEELS
TURNTABLE SPEED	•0-15RPM
CARRIAGE DRIVE	•1/2HP SCR DRIVE •#50 ANSI CHAIN, 60:1 GEARBOX
FILM DELIVERY	•STANDARD SPRING LOAD© DYNAMIC CARRIAGE WITH 100%+ TENSION STRETCH **OR UPGRADE TO** HURRICANE© PRESTRETCH FILM CARRIAGE
FILM ROLL	•20" MACHINE FILM, 3" CORE
POWER REQ.	•115VAC, 15A, 60Hz- PLUG AND PLAY

SAFETY	•FULLY GUARDED TOWER & MOVING PARTS •NO PINCH: CARRIAGE ROLLERS-ROTATE OUTWARD •EMERGENCY STOP BUTTON
OPTIONS	•PRESTRETCH FILM CARRIAGE •BASE EXTENSION •LOADING RAMP •COMBINATION RAMP (For powered hand trucks) •INTEGRATED SCALE PACKAGE •SAFETY FENCING •SAFETY LIGHT CURTAINS

*SUGGESTED LOADS PER HOUR- May vary depending on load sizes, loading/unloading speeds and number of wraps or wrapping pauses on load.


FPS 300

HURRICANE THREAD© PRESTRETCH CARRIAGE

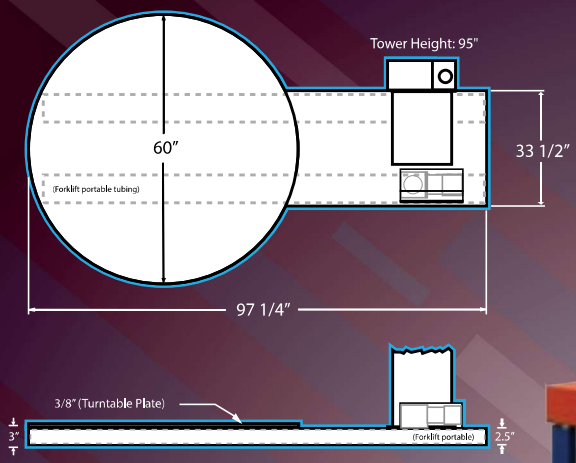



POWER DE-ENERGIZED WHEN CARRIAGE DOOR OPEN

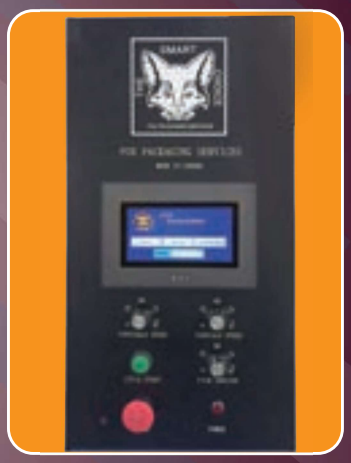

7" FULL COLOR TOUCH SCREEN

SPECIFICATIONS:


CONTROLS	•FULL COLOR 7" PLC TOUCH SCREEN CONTROLS
PRODUCTION SPEED	•1-40 LPH*
LOAD SIZE	•55"L x 55"W x 90"H (80" Diagonal)
WEIGHT CAPACITY	•5000LBS
STRUCTURAL	•WELDED STEEL CONSTRUCTION
TURNTABLE DRIVE	•3/4HP AC MOTOR & DELTA 1HP VFD DRIVE •#50 ANSI CHAIN, 20:1 GEARBOX •36 TABLE SUPPORT WHEELS
TURNTABLE SPEED	•0-15RPM
CARRIAGE DRIVE	•3/4HP AC MOTOR & DELTA 1HP VFD DRIVE •#50 ANSI CHAIN, 60:1 GEARBOX
FILM DELIVERY	•HURRICANE THREAD© PRESTRETCH CARRIAGE •200% FACTORY SET PRESTRETCH •50-250% STRETCH AVAILABLE ON REQUEST
FILM ROLL	•20" MACHINE FILM, 3" CORE
POWER REQ.	•115VAC, 15A, 60Hz- PLUG AND PLAY

SAFETY	•SAFEGUARD FULLY GUARDED TOWER & MOVING PARTS •NO PINCH: CARRIAGE DE-ENERGIZED WHEN DOOR OPEN •EMERGENCY STOP BUTTON
ONBOARD PROGRAMS	•STANDARD WRAP CYCLE •STANDARD W/TOP COVER PAUSE •BOTTOM WRAPS FIRST •WRAP UPWARDS ONLY
OPTIONS	•HEIGHT/BASE EXTENSION •LOADING RAMP •COMBINATION RAMP (For powered hand trucks) •INTEGRATED SCALE PACKAGE •SAFETY FENCING •SAFETY LIGHT CURTAINS

*SUGGESTED LOADS PER HOUR- May vary depending on load sizes, loading/unloading speeds and number of wraps or wrapping pauses on load.


FPS 400L

FULLY SKIRTED LOW PROFILE

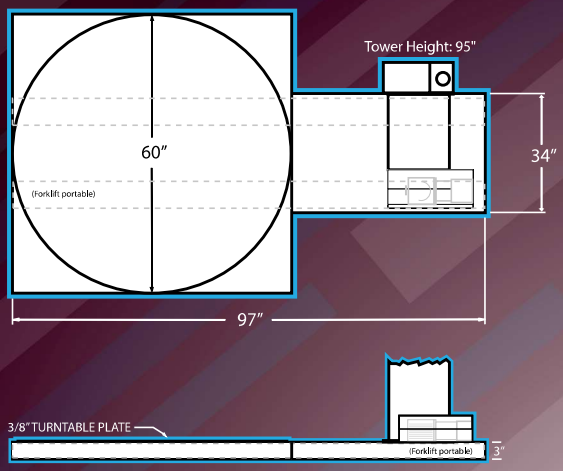



POWER DE-ENERGIZED WHEN CARRIAGE DOOR OPEN

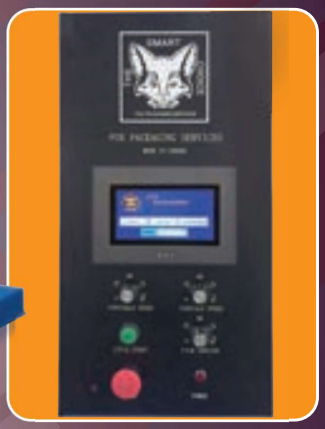

7" FULL COLOR TOUCH SCREEN

SPECIFICATIONS:


CONTROLS	•FULL COLOR 7" PLC TOUCH SCREEN
PRODUCTION SPEED	•1-40 LPH*
LOAD SIZE	•55"L x 55"W x 90"H (80" Diagonal)
WEIGHT CAPACITY	•5000LBS OR **UPGRADE TO 6500LBS**
STRUCTURAL	•FULL SKIRT WELDED STEEL CONSTRUCTION
TURNTABLE DRIVE	•3/4HP AC MOTOR & DELTA 1HP VFD DRIVE •#50 ANSI CHAIN, 20:1 GEARBOX •40 TABLE SUPPORT WHEELS
TURNTABLE SPEED	•0-15RPM
CARRIAGE DRIVE	•3/4HP AC MOTOR & DELTA 1HP VFD DRIVE •#50 ANSI CHAIN, 60:1 GEARBOX
FILM DELIVERY	•HURRICANE THREAD© PRESTRETCH CARRIAGE •200% FACTORY SET PRESTRETCH •50-250% STRETCH AVAILABLE ON REQUEST
FILM ROLL	•20" MACHINE FILM, 3" CORE
POWER REQ.	•115VAC, 15A, 60Hz- PLUG AND PLAY

SAFETY	•FULLY GUARDED TOWER & MOVING PARTS •NO PINCH: CARRIAGE DE-ENERGIZED WHEN DOOR OPEN •EMERGENCY STOP BUTTON
ONBOARD PROGRAMS	•STANDARD WRAP CYCLE •STANDARD W/TOP COVER PAUSE •BOTTOM WRAPS FIRST •WRAP UPWARDS ONLY
OPTIONS	•HEIGHT/BASE EXTENSION •LOADING RAMP •HEAVY DUTY EXTENDED RAMP (For powered hand trucks) •INTEGRATED SCALE PACKAGE •DUAL TURNTABLE (400LDT) •SAFEY FENCING/LIGHT CURTAINS

*SUGGESTED LOADS PER HOUR- May vary depending on load sizes, loading/unloading speeds and number of wraps or wrapping pauses on load.


FPS 400H

HIGH PROFILE

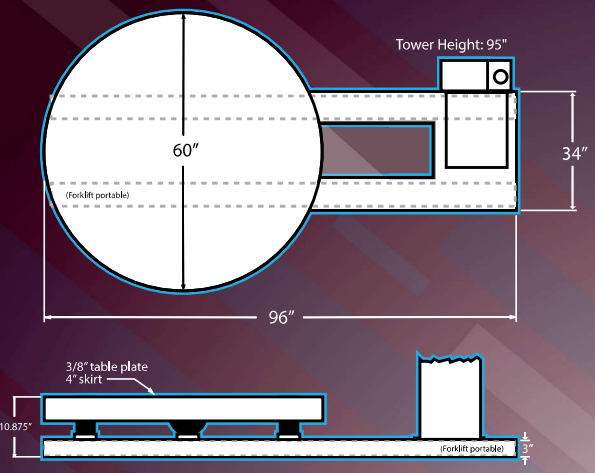



POWER DE-ENERGIZED WHEN CARRIAGE DOOR OPEN

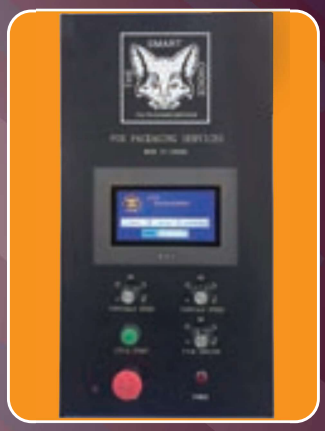

7" FULL COLOR TOUCH SCREEN

SPECIFICATIONS:


CONTROLS	•FULL COLOR 7" PLC TOUCH SCREEN
PRODUCTION SPEED	•1-40 LPH*
LOAD SIZE	•55"L x 55"W x 90"H (80" Diagonal)
WEIGHT CAPACITY	•5000LBS
STRUCTURAL	•WELDED STEEL CONSTRUCTION
TURNTABLE DRIVE	•3/4HP AC MOTOR & DELTA 1HP VFD DRIVE •#50 ANSI CHAIN, 20:1 GEARBOX •4 HEAVY DUTY CASTERS
TURNTABLE SPEED	•0-15RPM
CARRIAGE DRIVE	•3/4HP AC MOTOR & DELTA 1HP VFD DRIVE •#50 ANSI CHAIN, 60:1 GEARBOX
FILM DELIVERY	•HURRICANE THREAD© PRESTRETCH CARRIAGE •200% FACTORY SET PRESTRETCH •50-250% STRETCH AVAILABLE ON REQUEST
FILM ROLL	•20" MACHINE FILM, 3" CORE
POWER REQ.	•115VAC, 15A, 60Hz- PLUG AND PLAY


SAFETY	•FULLY GUARDED TOWER & MOVING PARTS •NO PINCH: CARRIAGE DE-ENERGIZED WHEN DOOR OPEN •EMERGENCY STOP BUTTON
ONBOARD PROGRAMS	•STANDARD WRAP CYCLE •STANDARD W/TOP COVER PAUSE •BOTTOM WRAPS FIRST •WRAP UPWARDS ONLY
OPTIONS	•HEIGHT/BASE EXTENSION •INTEGRATED SCALE PACKAGE •DUAL TURNTABLE (400HDT) •SAFETY FENCING •SAFETY LIGHT CURTAINS •SPLIT BASE (FOR OVERSIZED LOADS)

*SUGGESTED LOADS PER HOUR- May vary depending on load sizes, loading/unloading speeds and number of wraps or wrapping pauses on load.

FPS 500H

HEAVY DUTY HIGH PROFILE- **8000LBS CAPACITY**

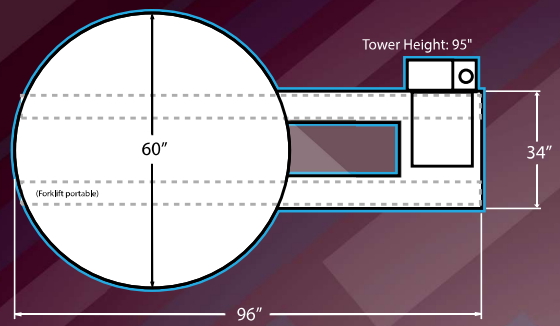

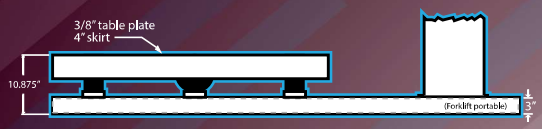



POWER DE-ENERGIZED WHEN CARRIAGE DOOR OPEN



7" FULL COLOR TOUCH SCREEN

SPECIFICATIONS:


CONTROLS	•FULL COLOR 7" PLC TOUCH SCREEN
PRODUCTION SPEED	•1-55 LPH*
LOAD SIZE	•55"L x 55"W x 82"H (80" Diagonal)
WEIGHT CAPACITY	•**8000LBS**
STRUCTURAL	•WELDED STEEL CONSTRUCTION
TURNTABLE DRIVE	•3/4HP AC MOTOR & DELTA 1HP VFD DRIVE •#50 ANSI CHAIN, 20:1 GEARBOX •DIRECT DRIVE RING & PINION BEARING •4 HEAVY DUTY SWIVEL CASTERS
TURNTABLE SPEED	•0-15RPM
CARRIAGE DRIVE	•3/4HP AC MOTOR & DELTA 1HP VFD DRIVE •#50 ANSI CHAIN, 60:1 GEARBOX
FILM DELIVERY	•HURRICANE THREAD© PRESTRETCH CARRIAGE •200% FACTORY SET PRESTRETCH •50-250% STRETCH AVAILABLE ON REQUEST
FILM ROLL	•20" MACHINE FILM, 3" CORE
POWER REQ.	•115VAC, 15A, 60Hz- PLUG AND PLAY

SAFETY	•FULLY GUARDED TOWER & MOVING PARTS •NO PINCH: CARRIAGE DE-ENERGIZED WHEN DOOR OPEN •EMERGENCY STOP BUTTON
ONBOARD PROGRAMS	•STANDARD WRAP CYCLE •STANDARD W/TOP COVER PAUSE •BOTTOM WRAPS FIRST •WRAP UPWARDS ONLY
OPTIONS	•HEIGHT/BASE EXTENSION •INTEGRATED SCALE PACKAGE •DUAL TURNTABLE (500HDT) •SAFETY FENCING •SAFETY LIGHT CURTAINS •SPLIT BASE (FOR OVERSIZED LOADS)

*SUGGESTED LOADS PER HOUR- May vary depending on load sizes, loading/unloading speeds and number of wraps or wrapping pauses on load.


FPS 400LDT

DUAL TURNTABLE SEMI AUTOMATIC

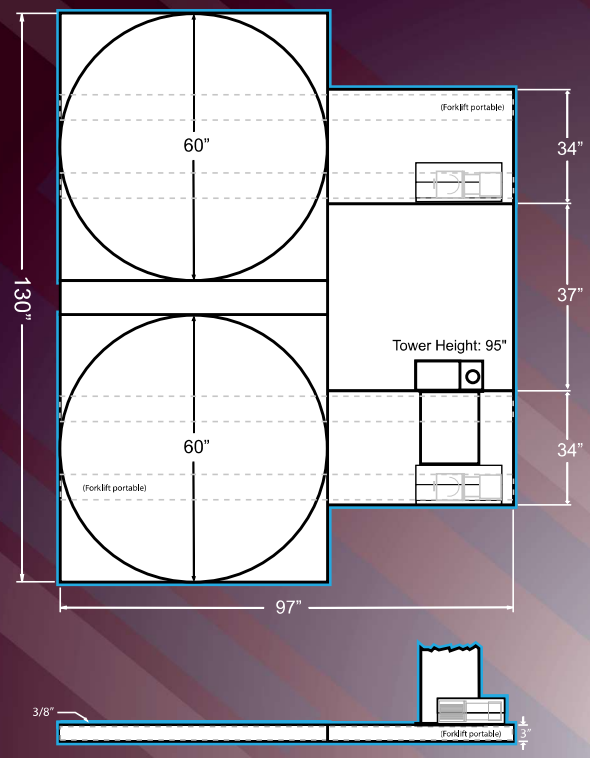



POWER DE-ENERGIZED WHEN CARRIAGE DOOR OPEN

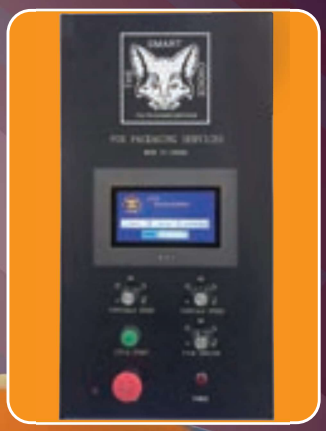

7" FULL COLOR TOUCH SCREEN

HIGH PROFILE AVAILABLE 400HDT

SPECIFICATIONS:


CONTROLS	•FULL COLOR 7" PLC TOUCH SCREEN
PRODUCTION SPEED	•1-40 LPH*
LOAD SIZE	•55"L x 55"W x 90"H (80" Diagonal)
WEIGHT CAPACITY	•5000LBS OR **UPGRADE TO 6500LBS**
STRUCTURAL	•FULL SKIRT WELDED STEEL CONSTRUCTION
TURNTABLE DRIVE	•3/4HP AC MOTOR & DELTA 1HP VFD DRIVE •#50 ANSI CHAIN, 20:1 GEARBOX •40 TABLE SUPPORT WHEELS
TURNTABLE SPEED	•0-15RPM
CARRIAGE DRIVE	•3/4HP AC MOTOR & DELTA 1HP VFD DRIVE •#50 ANSI CHAIN, 60:1 GEARBOX
FILM DELIVERY	•HURRICANE THREAD© PRESTRETCH CARRIAGE •200% FACTORY SET PRESTRETCH •50-250% STRETCH AVAILABLE ON REQUEST
FILM ROLL	•20" MACHINE FILM, 3" CORE
POWER REQ.	•115VAC, 15A, 60Hz- PLUG AND PLAY

SAFETY	•FULLY GUARDED TOWER & MOVING PARTS •NO PINCH: CARRIAGE DE-ENERGIZED WHEN DOOR OPEN •EMERGENCY STOP BUTTON
ONBOARD PROGRAMS	•STANDARD WRAP CYCLE •STANDARD W/TOP COVER PAUSE •BOTTOM WRAPS FIRST •WRAP UPWARDS ONLY
OPTIONS	•HEIGHT/BASE EXTENSION •LOADING RAMP •HEAVY DUTY EXTENDED RAMP (For powered hand trucks) •INTEGRATED SCALE PACKAGE •SAFETY FENCING •SAFETY LIGHT CURTAINS

*SUGGESTED LOADS PER HOUR- May vary depending on load sizes, loading/unloading speeds and number of wraps or wrapping pauses on load.

FPS 300PA

PORTABLE AUTOMATIC-LOW PROFILE

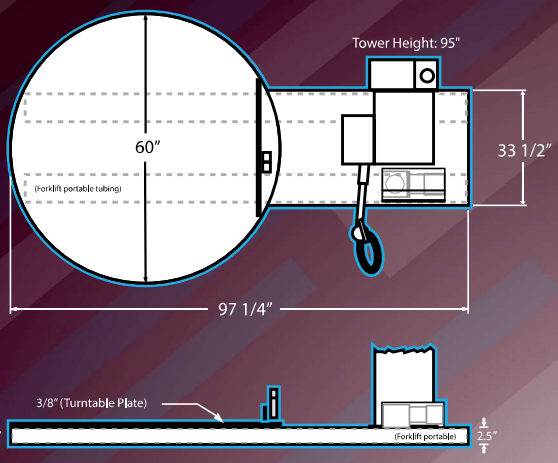



POWER DE-ENERGIZED WHEN CARRIAGE DOOR OPEN



7" FULL COLOR TOUCH SCREEN


SPECIFICATIONS:

CONTROLS	•FULL COLOR 7" PLC TOUCH SCREEN CONTROLS	**SAFETY**	•SAFEGUARD FULLY GUARDED TOWER & MOVING PARTS
PRODUCTION SPEED	•1-40 LPH*		•NO PINCH: CARRIAGE DE-ENERGIZED WHEN DOOR OPEN
LOAD SIZE	•55"L x 55"W x 90"H (80" Diagonal)		•EMERGENCY STOP BUTTON
WEIGHT CAPACITY	•5000LBS	**ONBOARD PROGRAMS**	•STANDARD WRAP CYCLE
STRUCTURAL	•WELDED STEEL CONSTRUCTION		•STANDARD W/TOP COVER PAUSE
TURNTABLE DRIVE	•3/4HP AC MOTOR & DELTA 1HP VFD DRIVE		•BOTTOM WRAPS FIRST
	•#50 ANSI CHAIN, 20:1 GEARBOX		•WRAP UPWARDS ONLY
	•36 TABLE SUPPORT WHEELS	**OPTIONS**	•HEIGHT/BASE EXTENSION
TURNTABLE SPEED	•0-15RPM		•LOADING RAMP
CARRIAGE DRIVE	•3/4HP AC MOTOR & DELTA 1HP VFD DRIVE		•COMBINATION RAMP (For powered hand trucks)
	•#50 ANSI CHAIN, 60:1 GEARBOX		•INTEGRATED SCALE PACKAGE
FILM DELIVERY	•HURRICANE THREAD© PRESTRETCH CARRIAGE		•SAFETY FENCING
	•200% FACTORY SET PRESTRETCH		•SAFETY LIGHT CURTAINS
	•50-250% STRETCH AVAILABLE ON REQUEST		
FILM ROLL	•20" MACHINE FILM, 3" CORE		
POWER REQ.	•115VAC, 15A, 60Hz- PLUG AND PLAY		

*SUGGESTED LOADS PER HOUR- May vary depending on load sizes, loading/unloading speeds and number of wraps or wrapping pauses on load.

FPS 400LPA

PORTABLE AUTOMATIC-LOW PROFILE

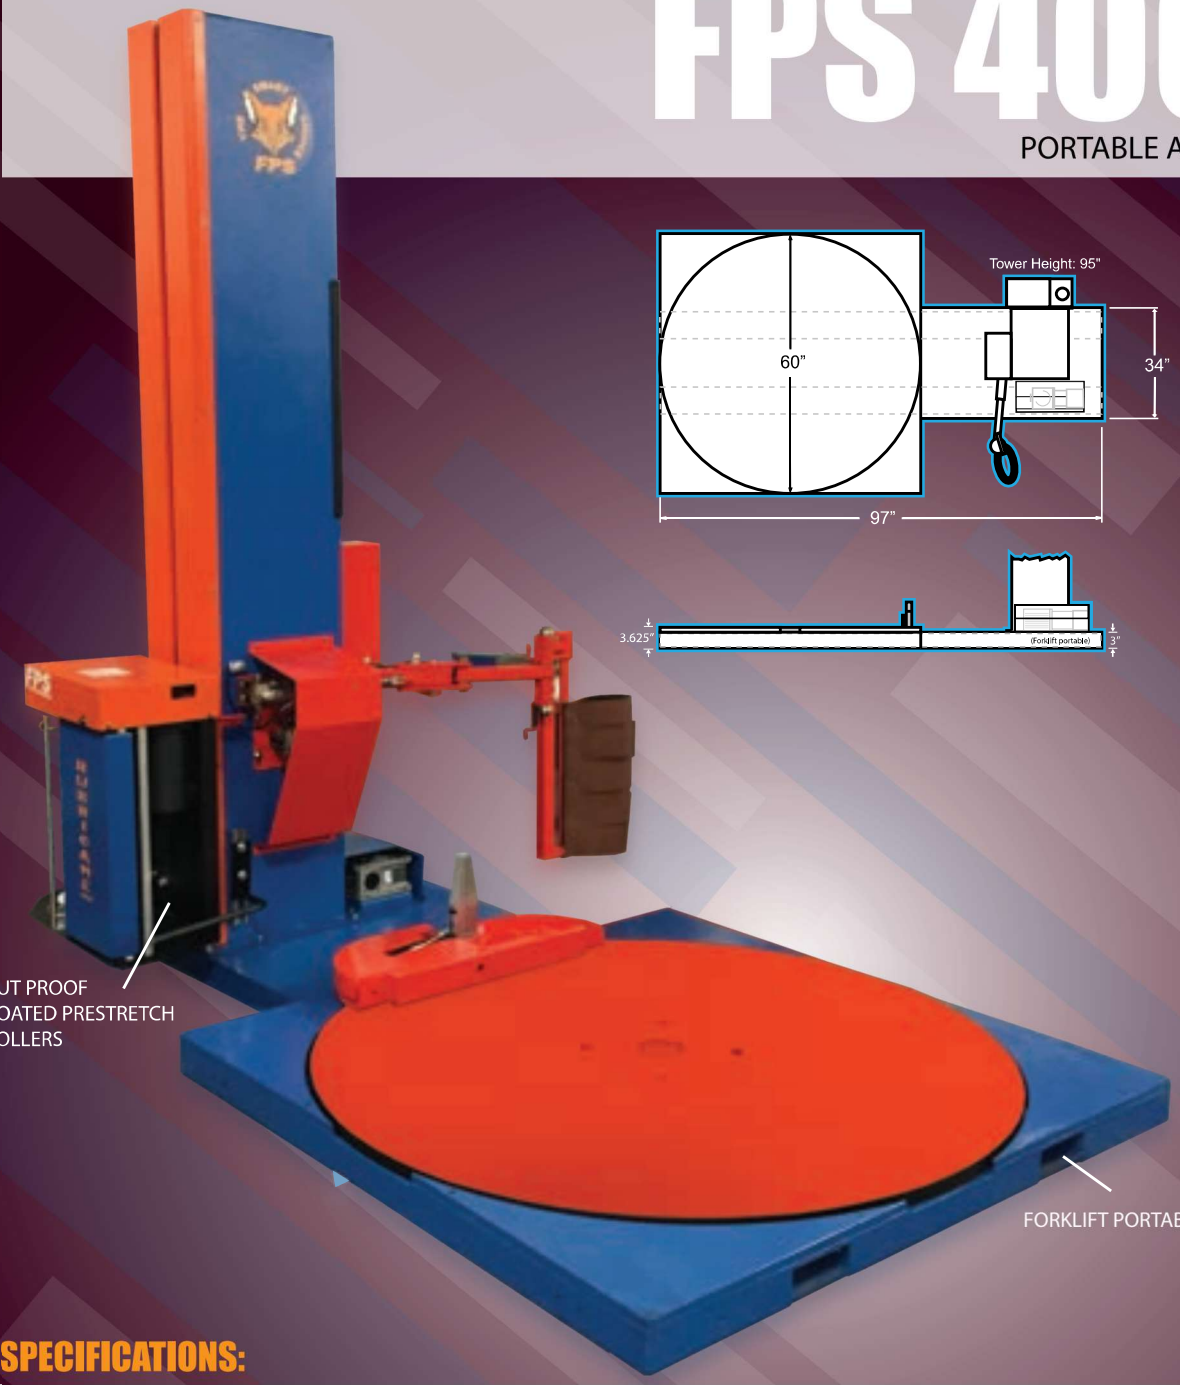



POWER DE-ENERGIZED WHEN CARRIAGE DOOR OPEN



7" FULL COLOR TOUCH SCREEN

SPECIFICATIONS:


CONTROLS	•FULL COLOR 7" PLC TOUCH SCREEN •REMOTE CONTROL START
PRODUCTION SPEED	•1-40 LPH*
LOAD SIZE	•55"L x 55"W x 90"H (80" Diagonal)
WEIGHT CAPACITY	•5000LBS OR **UPGRADE TO 6500LBS**
STRUCTURAL	•FULL SKIRT WELDED STEEL CONSTRUCTION
TURNTABLE DRIVE	•3/4HP AC MOTOR & DELTA 1HP VFD DRIVE •#50 ANSI CHAIN, 20:1 GEARBOX •40 TABLE SUPPORT WHEELS
TURNTABLE SPEED	•0-15RPM
CARRIAGE DRIVE	•3/4HP AC MOTOR & DELTA 1HP VFD DRIVE •#50 ANSI CHAIN, 60:1 GEARBOX
FILM DELIVERY	•HURRICANE THREAD© PRESTRETCH CARRIAGE •200% FACTORY SET PRESTRETCH •50-250% STRETCH AVAILABLE ON REQUEST
FILM ROLL	•20" MACHINE FILM, 3" CORE
POWER REQ.	•115VAC, 15A, 60Hz- PLUG AND PLAY

SAFETY	•FULLY GUARDED TOWER & MOVING PARTS •NO PINCH: CARRIAGE DE-ENERGIZED WHEN DOOR OPEN •EMERGENCY STOP BUTTON
ONBOARD PROGRAMS	•STANDARD WRAP CYCLE •STANDARD W/TOP COVER PAUSE •BOTTOM WRAPS FIRST •WRAP UPWARDS ONLY
OPTIONS	•HEIGHT/BASE EXTENSION •LOADING RAMP •HEAVY DUTY EXTENDED RAMP (For powered hand trucks) •INTEGRATED SCALE PACKAGE •SAFETY FENCING •SAFETY LIGHT CURTAINS

*SUGGESTED LOADS PER HOUR- May vary depending on load sizes, loading/unloading speeds and number of wraps or wrapping pauses on load.

FPS 400HPA

PORTABLE AUTOMATIC-HIGH PROFILE

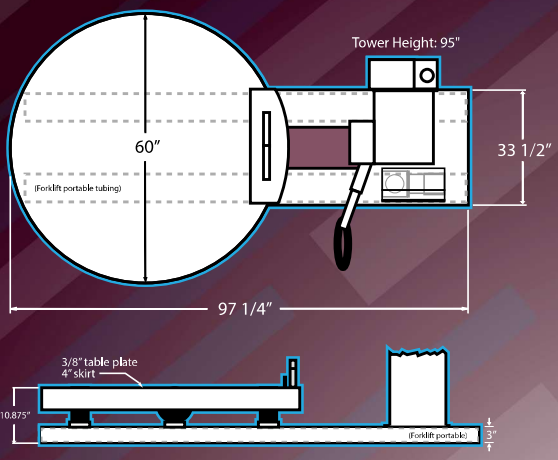



POWER DE-ENERGIZED WHEN CARRIAGE DOOR OPEN



7" FULL COLOR TOUCH SCREEN

HEAVY DUTY MODEL AVAILABLE (500HPA)


SPECIFICATIONS:

CONTROLS	•FULL COLOR 7" PLC TOUCH SCREEN •REMOTE CONTROL START
PRODUCTION SPEED	•1-55 LPH*
LOAD SIZE	•55"L x 55"W x 82"H (80" Diagonal)
WEIGHT CAPACITY	•5000LBS OR **UPGRADE TO 8000LBS** (500HPA)
STRUCTURAL	•WELDED STEEL CONSTRUCTION
TURNTABLE DRIVE	•3/4HP AC MOTOR & DELTA 1HP VFD DRIVE •#50 ANSI CHAIN, 20:1 GEARBOX •DIRECT DRIVE RING & PINION BEARING •4 HEAVY DUTY CASTERS
TURNTABLE SPEED	•0-15RPM
CARRIAGE DRIVE	•3/4HP AC MOTOR & DELTA 1HP VFD DRIVE •#50 ANSI CHAIN, 60:1 GEARBOX
FILM DELIVERY	•HURRICANE THREAD© PRESTRETCH CARRIAGE •200% FACTORY SET PRESTRETCH •50-250% STRETCH AVAILABLE ON REQUEST
FILM ROLL	•20" MACHINE FILM, 3" CORE
POWER REQ.	•115VAC, 15A, 60Hz- PLUG AND PLAY
SAFETY	•FULLY GUARDED TOWER & MOVING PARTS •NO PINCH: CARRIAGE DE-ENERGIZED WHEN DOOR OPEN •EMERGENCY STOP BUTTON
ONBOARD PROGRAMS	•STANDARD WRAP CYCLE •STANDARD W/TOP COVER PAUSE •BOTTOM WRAPS FIRST •WRAP UPWARDS ONLY
OPTIONS	•HEIGHT/BASE EXTENSION •INTEGRATED SCALE PACKAGE •SAFETY FENCING •SAFETY LIGHT CURTAINS

*SUGGESTED LOADS PER HOUR- May vary depending on load sizes, loading/unloading speeds and number of wraps or wrapping pauses on load.

FPS 600

CUSTOMIZABLE INLINE TURNTABLE AUTOMATIC

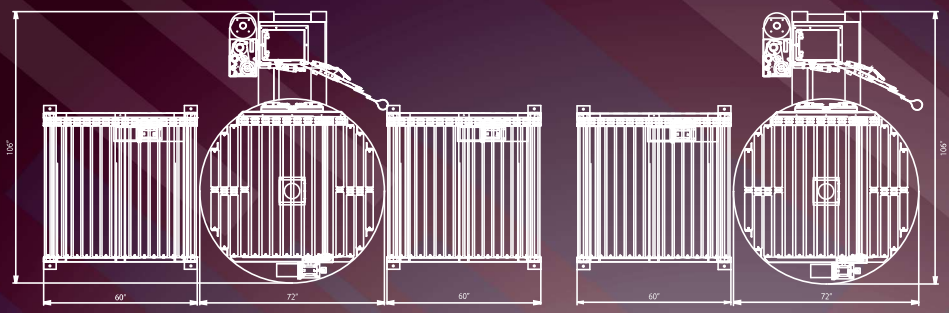

POWERED INFEED & EXIT

POWERED EXIT

** FPS 600 shown with gravity feed exit conveyor and staging photo eyes (not included)*

SPECIFICATIONS:


CONTROLS	•FULL COLOR 7" PLC TOUCH SCREEN
PRODUCTION SPEED	•1-40 LPH*
LOAD SIZE	•BASED ON CUSTOMER REQUIREMENT
WEIGHT CAPACITY	•**8000LBS**
STRUCTURAL	•FULL SKIRT WELDED STEEL CONSTRUCTION
TURNTABLE DRIVE	•1HP AC MOTOR & DELTA 1HP VFD DRIVE
	•DIRECT GEAR DRIVE RING AND PINION
	•4 HEAVY DUTY CASTERS
TURNTABLE SPEED	•0-15RPM
CARRIAGE DRIVE	•3/4HP AC MOTOR & DELTA 1HP VFD DRIVE
	•#50 ANSI CHAIN, 60:1 GEARBOX
FILM DELIVERY	•HURRICANE THREAD© PRESTRETCH CARRIAGE
	•200% FACTORY SET PRESTRETCH
	•50-250% STRETCH AVAILABLE ON REQUEST
FILM ROLL	•20" MACHINE FILM, 3" CORE
POWER REQ.	•BASED ON CUSTOMER REQUIREMENTS
AIR REQ.	•80 P.S.I.@ 3 CFM
SAFETY	•FULLY GUARDED TOWER & MOVING PARTS
	•NO PINCH: CARRIAGE DE-ENERGIZED WHEN DOOR OPEN
	•EMERGENCY STOP BUTTON
ONBOARD PROGRAMS	•STANDARD WRAP CYCLE
	•STANDARD W/TOP COVER PAUSE
	•BOTTOM WRAPS FIRST
	•WRAP UPWARDS ONLY
OPTIONS	•HEIGHT/BASE EXTENSION
	•INTEGRATED SCALE PACKAGE
	•GRAVITY OR POWERED INFEED-EXIT CONVEYORS
	•SAFETY FENCING
	•SAFETY LIGHT CURTAINS

*SUGGESTED LOADS PER HOUR- May vary depending on load sizes, loading/unloading speeds and number of wraps or wrapping pauses on load.

FPS 800

SEMI-AUTOMATIC ROTARY ARM



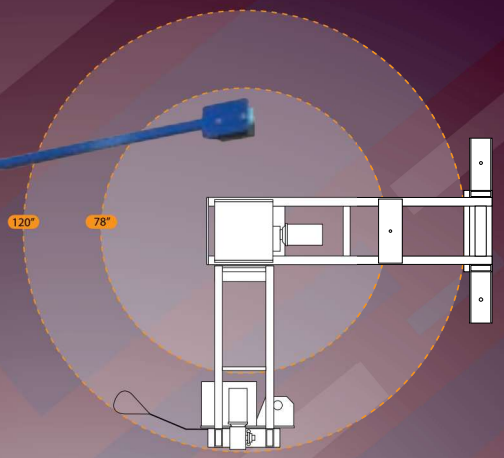

STANDARD HEIGHT: 108"



CUT PROOF COATED PRESTRETCH ROLLERS

FPS 800 WALL MOUNT



FPS 800 FREESTAND



FPS 800 4 LEG GANTRY (3 LEG ALSO AVAILABLE)

SPECIFICATIONS:

CONTROLS	•FULL COLOR 7" PLC TOUCH SCREEN
PRODUCTION SPEED	•1-40 LPH*
LOAD SIZE	•55"L x 55"W x 82"H (80" Diagonal)
WEIGHT CAPACITY	•UNLIMITED
STRUCTURAL	•WELDED STEEL TUBE CONSTRUCTION
ARM DRIVE	•3/4HP AC MOTOR & DELTA 1HP VFD DRIVE •20:1 GEARBOX •DIRECT GEAR DRIVE RING & PINION
ARM SPEED	•0-15RPM
CARRIAGE DRIVE	•3/4HP AC MOTOR & DELTA 1HP VFD DRIVE •#50 ANSI CHAIN, 60:1 GEARBOX
FILM DELIVERY	•HURRICANE THREAD© PRESTRETCH CARRIAGE •200% FACTORY SET PRESTRETCH •50-250% STRETCH AVAILABLE ON REQUEST
FILM ROLL	•20" MACHINE FILM, 3" CORE
POWER REQ.	•115VAC, 15A, 60Hz- PLUG AND PLAY
SAFETY	•NO PINCH: CARRIAGE DE-ENERGIZED WHEN DOOR OPEN •EMERGENCY STOP BUTTON
ONBOARD PROGRAMS	•STANDARD WRAP CYCLE •STANDARD W/TOP COVER PAUSE •BOTTOM WRAPS FIRST •WRAP UPWARDS ONLY
OPTIONS	•HEIGHT/ARM EXTENSION •WALL MOUNT, FREE STAND, 3 OR 4 LEG GANTRY •SAFETY LIGHT CURTAINS •SAFETY FENCING

*SUGGESTED LOADS PER HOUR- May vary depending on load sizes, loading/unloading speeds and number of wraps or wrapping pauses on load.

FPS 800PA


PORTABLE AUTOMATIC ROTARY ARM



FPS 800PA 4 LEG GANTRY (3 LEG ALSO AVAILABLE)



KEYPAD TOUCH CONTROLS



STANDARD HEIGHT: 108"



CUT PROOF
COATED PRESTRETCH
ROLLERS

SPECIFICATIONS:


CONTROLS	•FULL COLOR 7" PLC TOUCH SCREEN	**AIR REQ.**	•80 P.S.I.@ 3 CFM
PRODUCTION SPEED	•1-40 LPH*		
LOAD SIZE	•48"L x 48"W x 71"H (68" DIAGONAL)	**SAFETY**	•NO PINCH: CARRIAGE DE-ENERGIZED WHEN DOOR OPEN
WEIGHT CAPACITY	•UNLIMITED		
STRUCTURAL	•WELDED STEEL TUBE CONSTRUCTION		•EMERGENCY STOP BUTTON
ARM DRIVE	•1HP AC MOTOR & DELTA 1HP VFD DRIVE	**ONBOARD PROGRAMS**	•STANDARD WRAP CYCLE
	•DIRECT GEAR DRIVE RING AND PINION		•STANDARD W/TOP COVER PAUSE
ARM SPEED	•0-15RPM		•BOTTOM WRAPS FIRST
CARRIAGE DRIVE	•3/4HP AC MOTOR & DELTA 1HP VFD DRIVE		•WRAP UPWARDS ONLY
	•#50 ANSI CHAIN, 60:1 GEARBOX		
FILM DELIVERY	•HURRICANE THREAD© PRESTRETCH CARRIAGE	**OPTIONS**	•HEIGHT/ARM EXTENSION
	•200% FACTORY SET PRESTRETCH		•WALL MOUNT, FREE STAND, 3 OR 4 LEG GANTRY
	•50-250% STRETCH AVAILABLE ON REQUEST		
FILM ROLL	•20" MACHINE FILM, 3" CORE		•SAFETY LIGHT CURTAINS
POWER REQ.	•BASED ON CUSTOMER REQUIREMENTS		•SAFETY FENCING

*SUGGESTED LOADS PER HOUR- May vary depending on load sizes, loading/unloading speeds and number of wraps or wrapping pauses on load.

FPS 800RTA

INLINE FULLY AUTOMATIC ROTARY ARM



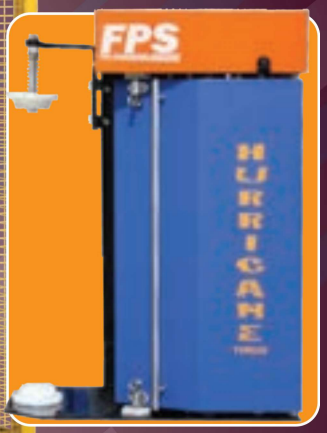

CUT PROOF
COATED PRESTRETCH
ROLLERS

SPECIFICATIONS:

CONTROLS	•FULL COLOR 7" PLC TOUCH SCREEN
PRODUCTION SPEED	•1-60 LPH*
LOAD SIZE	•48"L x 48"W x 71"H (68" DIAGONAL)
WEIGHT CAPACITY	•BASED ON CONVEYOR CAPACITY
STRUCTURAL	•WELDED STEEL TUBE CONSTRUCTION
ARM DRIVE	•1HP AC MOTOR & DELTA 1HP VFD DRIVE •DIRECT GEAR DRIVE RING AND PINION
ARM SPEED	•0-15RPM
CARRIAGE DRIVE	•3/4HP AC MOTOR & DELTA 1HP VFD DRIVE •#50 ANSI CHAIN, 60:1 GEARBOX
FILM DELIVERY	•HURRICANE THREAD© PRESTRETCH CARRIAGE •200% FACTORY SET PRESTRETCH •50-250% STRETCH AVAILABLE ON REQUEST
FILM ROLL	•20" MACHINE FILM, 3" CORE
POWER REQ.	•BASED ON CUSTOMER REQUIREMENTS
AIR REQ.	•80 P.S.I.@ 3 CFM
SAFETY	•NO PINCH: CARRIAGE DE-ENERGIZED WHEN DOOR OPEN •EMERGENCY STOP BUTTON
ONBOARD PROGRAMS	•STANDARD WRAP CYCLE •STANDARD W/TOP COVER PAUSE •BOTTOM WRAPS FIRST •WRAP UPWARDS ONLY
OPTIONS	•HEIGHT/ARM EXTENSION •WALL MOUNT, FREE STAND, 3 OR 4 LEG GANTRY •SAFETY LIGHT CURTAINS •SAFETY FENCING •GRAVITY/POWERED INFEED/ EXIT CONVEYORS

*SUGGESTED LOADS PER HOUR- May vary depending on load sizes, loading/unloading speeds and number of wraps or wrapping pauses on load.

FPS FT ORBITAL

AUTOMATIC FORKLIFT ORBITAL



SPECIFICATIONS:

CONTROLS	•FULL COLOR 7" PLC TOUCH SCREEN •REMOTE CONTROL START
PRODUCTION SPEED	•1-20 LPH*
LOAD SIZE	•48"L x 48"W x 53"H (80" Diagonal)
WEIGHT CAPACITY	•WEIGHT BASED ON FORKLIFT CAPACITY
STRUCTURAL	•WELDED STEEL CONSTRUCTION
RING DRIVE	•1HP AC MOTOR & DELTA 1HP VFD DRIVE •20:1 GEARBOX
RING SPEED	•0-15RPM
CARRIAGE DRIVE	•1/4HP DC MOTOR & DELTA 1HP VFD DRIVE •#35 ANSI CHAIN, 60:1 GEARBOX
FILM DELIVERY	•FRICTION CARRIAGE
FILM ROLL	•20" MACHINE FILM, 3" CORE
POWER REQ.	•115VAC, 15A, 60Hz- PLUG AND PLAY
SAFETY	•SAFETY DOOR INTERLOCK •EMERGENCY STOP BUTTON
ONBOARD PROGRAMS	•RING SPEED CONTROL •CARRIAGE SPEED CONTROL
OPTIONS	•SAFETY LIGHT CURTAINS •SAFETY FENCING

*SUGGESTED LOADS PER HOUR- May vary depending on load sizes, loading/unloading speeds and number of wraps or wrapping pauses on load.

ORBITAL



FPS 1000
MANUAL

- Ring sizes 10"-106"
- Foot Pedal Operated
- Friction Carriage
- Manual Film Cutter

FPS 2000
SEMI-AUTOMATIC

- PLC Touch Screen Control
- Foot Pedal Activated
- Ring Size 10"-106"
- Precision Steel Ring
- Automatic Film Clamp & Cut

FPS 3000
FULLY AUTOMATIC

- PLC Touch Screen Control
- Ring Size 10"-106"
- Precision Steel Ring
- Automatic Carriage Home Position
- Automatic Product Indexing
- Automatic Film Clamp & Cut
- Pre-Stretch Carriage Optional


SMART THE CHOICE FPS

Visit us online:
www.foxpkg.com

CUSTOMIZABLE TO FIT ANY APPLICATION

CUSTOM

WE CAN BUILD A MACHINE TO WRAP ANYTHING!

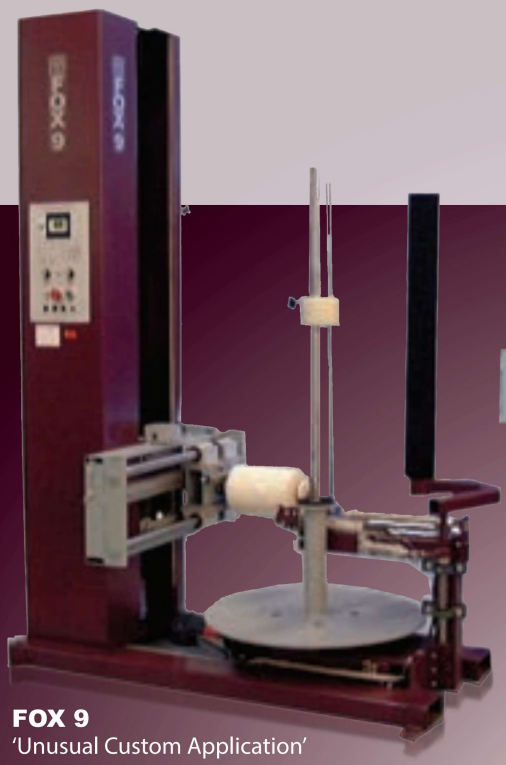


FOX 9
'Unusual Custom Application'

- Wraps stacks of unstable computer chair legs
- Automatic Film Apply & Cut
- Film carriage moves both vertically & horizontally



FOX R326-BB BEARING BANDER
'Unique Engineering'

- Servo Controlled
- Vertical Rollers rotate bearings during wrap cycle
- Programmable for 5"-15" bearings

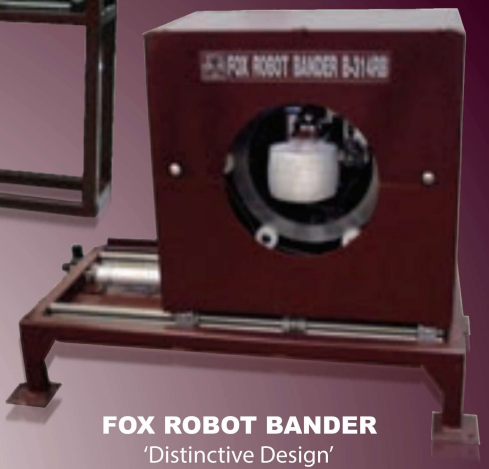

FOX ROBOT BANDER
'Distinctive Design'

WATCH VIDEO CLIPS OF THESE MACHINES ON OUR WEBSITE!


www.foxpkg.com





TOP PLATEN
TOP PLATENS SECURE UNSTABLE LOADS

WRAP:
SHUTTERS, DIVIDERS, OFFICE PANELS
WINDOWS & DOORS ETC.
LIGHT OR UNSTABLE LOADS

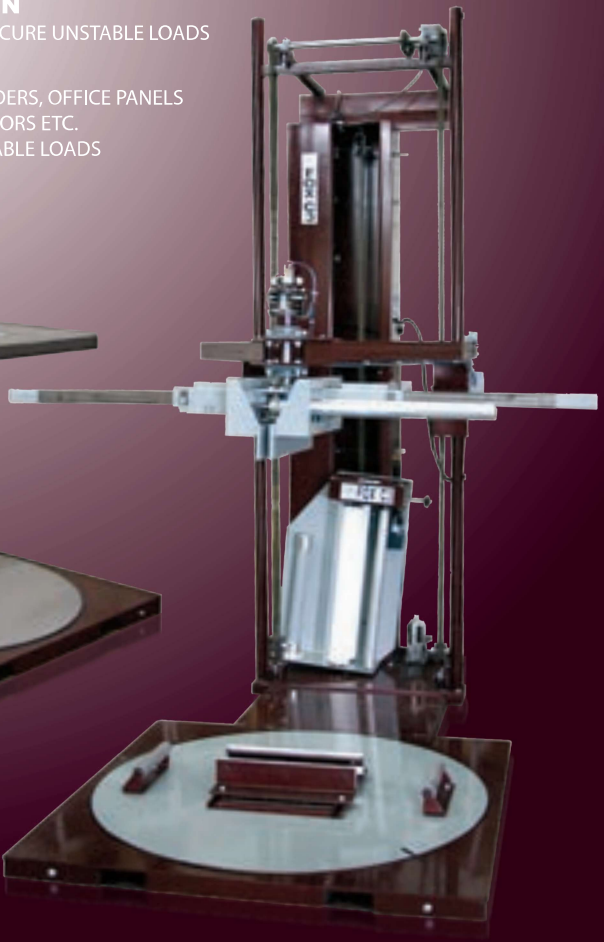

**COLORS MAY NOT BE AS SHOWN*